


## Impressora Integrada SP-RME4

The screenshot shows the 'Setting Tool V3.5849' window. On the left is a tree view with categories: POS Printer, Micro Printer, and Portable Printer. Under Micro Printer, several models are listed, with 'RME5' selected. The main area is divided into three sections: 'Port', 'Printer Current Serial Port', and 'Printer Setup'. The 'Port' section shows 'Port Type' set to 'USB1' and 'IP Address' as '192 . 168 . 1 . 114'. The 'Printer Current Serial Port' section shows 'Baud Rate' at '9600', 'Verify' as 'NONE', 'Data Bits' as '8', and 'Flow control' as 'RTS/CTS'. The 'Printer Setup' section contains 'Serial Port Parameters' (Baud Rate: Not Set, Verify: NONE, Data Bits: 8, Flow Control: RTS/CTS, Error Handling: Print "?") and other settings like Language (English), Code Page (Not Set), Font (12x24), Paper Sensor (Medium), Print Density (Medium), Instruction Set (ESC/POS), OD Instruction (Not Set), Buzzer (Not set), Black Mark Check (Not Set), and Print Direction (Not Set). On the right, there are fields for Manufacturer, Printer Type, Factory Date (17/08/2022), Bluetooth Open (off), Enable Bluetooth Password (not set), Bluetooth Name, Bluetooth Password, Bluetooth Type, and PaperEnd (NoSet). At the bottom right, there are checkboxes for 'Default Settings', 'Print Test', and a 'Set' button. A 'Help' button is in the top right corner.

```
[POS]
TimeOut=30
Marca=EPSON
Modelo=EPSON
Porta=USB:STMicroelectronics
HandShaking=NENHUM
```

Last update:  
2023/07/18  
13:25

manuais:easydash:homologacoes <http://wiki.iws.com.br/doku.php?id=manuais:easydash:homologacoes&rev=1689683146>

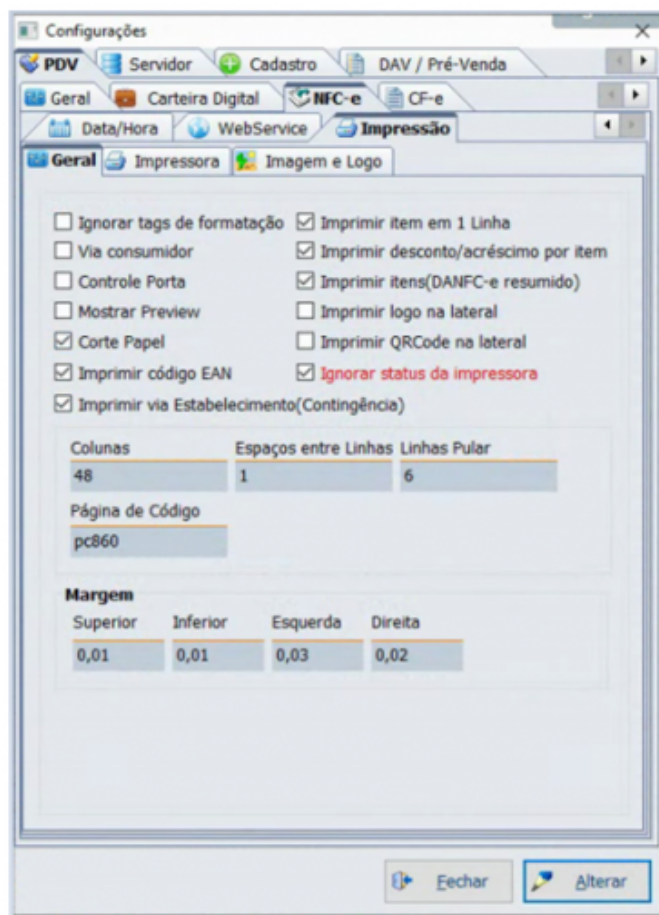

Configurações

PDV Servidor Cadastro DAV / Pré-Venda

Geral Carteira Digital NFC-e CF-e

Data/Hora WebService Impressão

Geral Impressora Imagem e Logo

☐ Ignorar tags de formatação ☒ Imprimir item em 1 Linha  
☐ Via consumidor ☒ Imprimir desconto/acrécimo por item  
☐ Controle Porta ☒ Imprimir itens(DANFC-e resumido)  
☐ Mostrar Preview ☐ Imprimir logo na lateral  
☒ Corte Papel ☐ Imprimir QRCode na lateral  
☒ Imprimir código EAN ☒ Ignorar status da impressora  
☒ Imprimir via Estabelecimento(Contingência)


Colunas: 48 Espaços entre Linhas: 1 Linhas Pular: 6

Página de Código: pc860

Margem

| Superior | Inferior | Esquerda | Direita |
|----------|----------|----------|---------|
| 0,01     | 0,01     | 0,03     | 0,02    |

Efechar Alterar

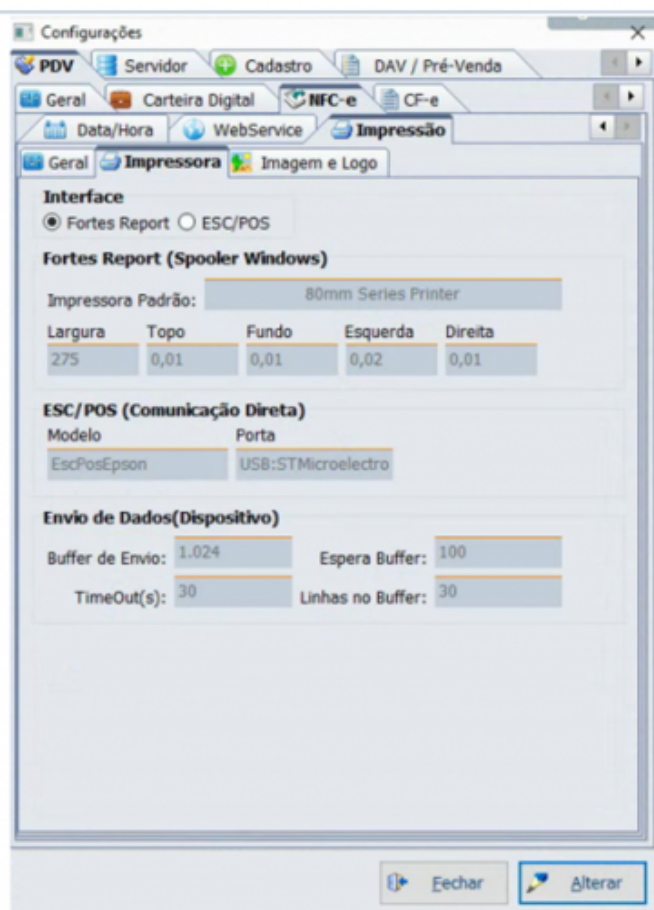

Configurações

PDV Servidor Cadastro DAV / Pré-Venda

Geral Carteira Digital NFC-e CF-e

Data/Hora WebService Impressão

Geral Impressora Imagem e Logo

Interface

☒ Fortes Report ☐ ESC/POS

Fortes Report (Spooler Windows)

Impressora Padrão: 80mm Series Printer

| Largura | Topo | Fundo | Esquerda | Direita |
|---------|------|-------|----------|---------|
| 275     | 0,01 | 0,01  | 0,02     | 0,01    |

ESC/POS (Comunicação Direta)

Modelo: EscPosEpson Porta: USB:STMicroelectro

Envio de Dados(Dispositivo)

Buffer de Envio: 1.024 Espera Buffer: 100

TimeOut(s): 30 Linhas no Buffer: 30

Efechar Alterar

From:  
<http://wiki.iws.com.br/> - Documentação de software

Permanent link:  
<http://wiki.iws.com.br/doku.php?id=manuais:easydash:homologacoes&rev=1689683146>

Last update: 2023/07/18 13:25